

**Government of India  
Bhabha Atomic Research Centre  
Accelerator Control Division**

Ref: ACnD/EMAS/18/521

Date: 10/7/2018

**Detailed Engineering, fabrication, assembly, testing, supply and safe delivery of permanent magnets based variable field dipole magnet confirming to the Technical Specification Number: ACnD/VFDM/18 dated 2.7.2018.**


Dear Sir/Madam,

Quotations are invited for "Detailed Engineering, fabrication, assembly, supply and safe delivery of permanent magnets based variable field dipole magnet confirming to the Technical Specification Number: ACnD/VFDM/18 dated 2.7.2018".

Bidder shall quote for deliverables as per technical specifications.

1. Free Issue material is involved (as per section 5.0 of technical specification sheet).
2. Taxes shall be quoted separately. Form AF/H whichever is applicable shall be provided, if required.
3. **The quotation must reach The Head, EMAS, ACnD by 23/7/2018 (12:00 Noon) and must be sent in a sealed envelope super scribed with the reference number & the due date given above. Courier are not allowed in BARC premises; the quotation shall be sent by speed post/registered post.**
4. The address on the envelope should read: **The Head,  
Electromagnetic Application Section,  
Accelerator Control Division,  
RCnD Bldg., North Site  
BARC, Trombay,  
Mumbai - 400 085.  
(Kind Attn: Elina Mishra, SO/D)**
5. The bidder shall complete the job within 12 weeks from the date of firm work order issued to the bidder. The finished components shall be delivered by the bidder at **RCZ stores, BARC, Trombay, Mumbai-400 085.**
6. Head, EMAS, Accelerator Control Division reserves the rights to accept/reject any or all quotations without assigning any reason.
7. In case of technical query, please contact Ms. Elina Mishra or Mr. Vikas Teotia (Extn No: 23943).
8. Delivery charges if any must be clearly mentioned in the offer. Quotation must also indicate the validity of offer. Quotation must also indicate the VAT no and PAN no of the party.
9. Drawings / Sketches must be returned along with the offer.
10. The quotation has to be signed by authorized person with company seal.
11. Payment will be made by cheque only after satisfactory completion of work on production of bill, delivery challan and advance stamped receipt. It may be noted that IT @ 2% and surcharge on tax at 15% shall be deducted from your bills.

Encl.: Technical Specification Sheet no: - ACnD/VFDM/18

  
10.7.18  
Sanjay Malhotra,  
Head, EMAS, ACnD

Specification no.	Revision no.	Total pages	Date
ACnD/VFDM/18	0	7	2.7.2018

**Detailed Engineering, fabrication, assembly, supply and safe delivery of permanent magnets based variable field dipole magnet**

**1.0 Scope**

This specification specifies “*Detailed Engineering, fabrication, assembly, supply and safe delivery of permanent magnets based variable field dipole magnet*”.

The variable field dipole magnet being fabricated is to be used as a source of magnetic field for XRD (X-Ray Diffraction experiments). These experiments provide a methodology to study the crystal lattice and atomic structure. Study of crystals in the presence of magnetic field provide insight to different interesting phenomena of atomic interactions.

The job includes fabrication of the magnetic yoke along with the tapered poles as per the drawing in the technical specification sheet. The aluminium bobbins with the sprockets is to be fabricated. Assembly of the permanent magnets in the aluminium sprockets is to be carried out with great care. For achieving variable magnetic field, a shunt magnetic plate is introduced with required linear guide system, spring system and handle. To mount the complete system, an aluminium support bench is also to be fabricated. For achieving desired magnetic field and required uniformity, precise fabrication of all the components is inevitable. Packaging and safe delivery is also under the scope of the supplier.

This document is organized as follows:

S. No	Particulars	Page
1.	Para 2.0 gives statement of purpose	1
2.	Para 3.0 gives details of delivery and scope of the supplier	2
3.	Para 4.0 gives vendor qualification	2
4.	Para 5.0 gives details of free issue material to be provided by the purchaser	3
5.	Para 6.0 gives technical specifications of the job	3
6.	Para 7.0 gives acceptance criteria	4
7.	Para 8.0 gives price	5
8.	Para 9.0 gives list of concept drawings attached	6
9.	Para 10.0 gives list of annexures	6
10.	Para 11.0 gives detail of general conditions	6

**2.0 Statement of purpose**

Investigating materials under extreme conditions like high temperature and high pressure provide important information about the microscopic interactions through structural evolution of new phases with unusual properties. This is performed by a non-destructive method called X-ray diffraction. It provides an insight to the atomic structure and unit cell dimension in the crystal material. In the presence of magnetic field, materials with strong spin-lattice interactions show interesting phenomena due to displacement of atoms. To study these phenomena in crystal structures, dipole magnet is required to generate the required magnetic field. The sample studies are done in a varying magnetic field regime, so the dipole magnet should produce a variable magnetic field. This is achieved by employing a shunt magnetic plate in addition.

### **3.0 Details of deliverables and scope of supply**

The list of the items to be fabricated, assembled, packed and safely delivered to the purchaser includes (reference documents and drawings attached):

<b>Item no.</b>	<b>Description</b>	<b>Quantity</b>
1.	Soft iron yoke with permanent magnets in the aluminium bobbin assembly	2 no
2.	Shunt assembly	2 no
3.	Aluminum frame	2 no

The scope of the supplier includes:

- Preparation of manufacturing drawings on the basis of engineering drawings provided by the purchaser. Approval shall be taken from the purchaser on the prepared manufacturing drawings before the start of fabrication.
- Purchase of raw material as per technical specification and produce test certificates for approval from purchaser before procuring.
- Manufacturing of magnet yoke, aluminium frame, complete shunt system with springs and linear guides, etc. as per Para 6.1 of this technical document.
- Assembly of the permanent magnets in the aluminum bobbin. Assembly of the bobbin with the soft iron yokes.
- Assembly of the shunt system with the linear motion system including springs, linear guides, screws, handles, digital micrometer, etc.
- Geometrical inspection of the fabricated components.
- Packing of the magnet assemblies and shipment of the same.

### **4.0 Vendor Qualification**

Suppliers will be qualified based on technical evaluation. As this is a multi-disciplinary work hence supplier must have technically qualified and trained staff for both mechanical and magnetics jobs. Supplier must have required infrastructure and past experience of similar jobs. Supplier will be evaluated based on the information provided by the supplier as requested below. Purchaser's specialists may visit the supplier facilities for evaluation and for detailed technical discussions.

<b>SN</b>	<b>Type of job</b>	<b>Outsourcing permissible (Yes/No)</b>
1.	Preparation of manufacturing drawings on the basis of engineering drawings provided by the purchaser.	No
2.	Fabrication of Magnet Yokes, aluminium frames and bobbins, assembly of permanent magnets with the yokes and the assembly of shunt system with the linear guide system. Supplier shall have fabrication facilities to meet the geometric tolerances of the job	No
3.	Geometric inspection using gantry based CMM having better than 5 microns accuracy	No
4.	Nickel plating of yoke	Yes

Purchaser's specialists may visit the supplier facilities for evaluation and for detailed technical discussions. Details to be furnished by the vendor related to facilities and expertise:

Particulars	To be filled by the vendor
Human resource (The supplier must give the complete detail of human resources including Engineers, Consultants (if any), Draftsmen, Technicians, Welder, Assembly Mechanic, quality control inspector, machinist etc.)	
Infrastructure: The supplier must give the details of infrastructure suitable for these jobs such as 3D Drafting software, Manufacturing machines, EDM wire cut machines, electrical and magnetic testing equipment, Assembly room, other tools and tackles, Inspection and Metrology facilities, building head room, overhead crane facility.	

#### **5.0 Details of Free Issue Material to be provided by the purchaser**

The following free issue material that will be provided to the supplier has been listed along with the cost.

Sr. No	Item	Quantity (no)	Cost (Rupees)
1.	Permanent Magnets (NdFeB type)	12	24,000

The supplier shall draw the insurance for the above free issue material in compliance with the DPS norms and regulations. The FIM is accountable however no scrap will be returned.

#### **6.0 Technical description of the job**

This technical specification document includes fabrication, assembly, inspection and supply of magnetic yoke and permanent magnet assembly for variable field dipole magnet. Precise fabrication and accurate qualification of the magnetic yoke are very critical for ensuring field uniformity within desired limits of good field region. The end use of these components demands fabrication within the tolerances and assembly of components which are covered in this document.

##### **6.1 Magnet yoke:**

- The yoke consists of two parts of equal geometry, dimension and precision. The entire yoke is to be build out of a single block of soft iron plate using EDM wire cut methodology. This will ensure parallelity and perpendicularity of the frame structure and hence the magnetic field components. The dimensions of the structure are strictly according to the drawings provided in the technical specification sheet (Drawing No: A3-A02VTCA74).
- The two magnet yokes are to be assembled with each other via aluminium bobbin with permanent magnets stacked in the bobbin.
- The constituted aluminium blocks are described in the next section.

## 6.2 Aluminium bobbin and permanent magnet assembly:

- The aluminium bobbin is made of 3 parts: one permanent magnet cage and 2 window frames.
- These three parts will be bolted together while assembling with the soft iron yokes.
- The aluminium cage should be fabricated using EDM wire cut for obtaining precise tolerances for ease assembly of the permanent magnets.
- There are 6 permanent magnets that are to be assembled in the aluminium bobbin. Utmost care should be taken while stacking permanent magnets since these are very strong magnets which if handled carelessly can lead to material damage as well as can cause harm to the personnel handling them.
- Once the magnets have been stacked in the aluminium cage and the window frames are bolted to the cage, the two soft iron yokes will then be assembled to the permanent magnet cage to form a single dipole assembly.

## 6.3 Aluminium frame:

- To mount the magnet on its desired position on the stage to bring the height of the sample to the center of the air gap of the dipole magnet, an aluminium mounting support system is fabricated. The geometry and the dimension is same as that provided in the drawing (Drawing No: A3-A02VTCA75). The structure should be fabricated strictly as per the drawing for proper alignment of the magnet.

## 6.4 Shunt assembly system:

- For producing a variable field permanent dipole magnet, an external arrangement needs to be provided to as to vary the field in the air gap.
- For achieving this, a U shaped soft iron plate with flat base is to be used which shall work as a shunt to bypass the magnetic field and reduce the field at the center of the air gap.
- For supporting this movable soft iron plate, a spring system and a screw guide system with linear bearings is to be employed. The geometry and the dimensions are provided in the drawing of the technical specifications.
- The soft iron plate will slide on a 4 legged support guide system with spring arrangement. Aluminium bush will be provided for stability and repeatability. These springs will provide a balance against the attracting magnetic forces on the plate by the permanent magnet assembly.
- A plate along with the screw and its associated housing will be fabricated as per the drawing for providing desired movement to the soft iron plate.
- A handle is to be provided at the top for easy turning of the screw and hence movement of the soft iron plate.

## 7 Acceptance criteria

Following are the acceptance criteria of the components and coils and other relevant parameters:

S.N.	Particulars	Acceptance criteria
1.	Visual	Any signs of damage, deterioration and oxidation shall not be present on any component. No burrs, rough edges and unfinished part of the job will be accepted.
2.	Geometric and dimensional accuracy of	Geometric tolerances of each and every component shall be strictly as per drawings. Geometric inspections shall be done

	sub components and the final assembly	<p>after each step and inspection reports (Annexure A) for all shall be prepared and submitted. The inspection report shall be based on scanned object on gantry based CMM and the deviation shall be compared and reported. The deviation must not be greater than 50 microns (and specified tolerances at different critical dimensions).</p> <p>Following are applicable to assembled magnet</p> <ol style="list-style-type: none"> <li>1. The air gap aperture shall be determined by measuring the inner distance between the opposite legs of the assembled magnet. This shall not vary more than <math>\pm 50</math> microns of the true value.</li> <li>2. Height, width and all other dimensions of the magnet shall be within <math>\pm 50</math> microns of the specified value.</li> <li>3. Flatness, parallelity and perpendicularity of different surfaces should be within the specified tolerances.</li> <li>4. Repeatability of the assembly with values within <math>\pm 50</math> microns.</li> <li>5. The springs that are used to support the soft iron plate shall be as per the design and dimensions specified.</li> </ol>
--	---------------------------------------	--

## 8 Price and delivery schedule

The supplier shall give overall price and its break-up for all the deliverables mentioned. The overall price will be compared. The supplier shall offer prices in following format.

Item no.	Description	Quantity	Price per unit	Total price
1.	Dipole magnet yoke fabrication and shunt assembly system	2 nos.		
2.	Aluminium bobbin and the permanent magnet assembly (Permanent magnets are FIM)	2 set		
3.	Aluminium base support	2 sets		

The cost incurred in preparation of jigs if any shall be included in the price as mentioned above. The work activity plan shall be as per our requirement. However, supplier shall give their activity schedule as per their resources.

Following program is required for the timescales of fabrication and delivery:

- |  |   |        |
|--|---|--------|
| a. Awarding the purchase order   | : | Week 0 |
| b. Preparation of approach paper by the supplier and sketch design           | : | Week 1 |
| c. Preparation of detailed engineering design including 2D and 3D drawings   | : | Week 3 |
| d. Procurement of raw material by supplier                                   | : | Week 8 |
| e. Manufacturing of Magnet yoke, aluminium support and shunt assembly system | : | Week15 |
| f. Manufacturing of Aluminum bobbin and assembly of permanent magnets        | : | Week17 |
| g. Assembly of the complete system   | : | Week18 |
| h. Inspection of the magnet assembly   | : | Week19 |
| i. Packaging and delivery  | : | Week20 |

The supplier can give their own schedule keeping in mind their timescales. Final schedule shall be given to the supplier along with the purchase order.

## 9 List of concept drawings attached

SN	Drawing title	Drawing Number
1.	General assembly drawing	A3-A02VTCA7
2.	Dipole Magnet with bobbin and permanent magnet assembly	A3-A02VTCA74
3.	Aluminium base support	A3-A02VTCA75

## 10 List of Annexures

SN	Annexure Name	Particular	Page No
1.	Annexure A	Geometrical qualification tests on the dipole magnet yoke.	7

## 11 General condition:


- a. All intellectual property rights belong to purchaser for work done under this technical specification/PO.
- b. Supplier shall maintain the authenticity of drawings or any related drawings/document provided by the purchaser.
- c. All activities would normally be carried with due professional care. However, purchaser shall not be responsible for any loss or personnel accident during execution of the work pertaining to the technical specifications under this PO.
- d. Supplier agree to hold in confidence all information provided by the purchaser.
- e. Supplier shall collaborate and coordinate all the work sub-contracted to any vendor.
- f. Publication if any pertaining to work of related to work under this purchase order can be done only after prior mutual consent of purchaser.
- g. All the raw materials required for deliverables except the Free Issue Material mentioned is in scope of supplier and the supplier should quote accordingly.
- h. Overall cost of all the items in the deliverables will be compared including packaging, forwarding and safe delivery to BARC RCZ stores and shall be quoted separately. The supplier should not furnish lump sum cost. Basic price, packing, forwarding & safe delivery charges shall be quoted separately.
- i. Suppliers shall give complete details of their product & list of users for technical evaluation.
- j. Supplier shall submit along with the quotation, compliance certificate adhering to the specifications.

## **ANNEXURE A**

### **(GEOMETRICAL QUALIFICATIONS TESTS)**

- The geometric dimensions of the components shall be strictly as per the fabrication drawings generated.
- Geometric tolerances of each and every component should be strictly adhered to.
- Geometric inspections shall be done after each step by scanning the object on CMM. The inspection report shall be based on scanned object on CMM and the deviation shall be compared and reported. The deviation must not be greater than 20 microns.
- This shall be repeated for all the fabricated components.



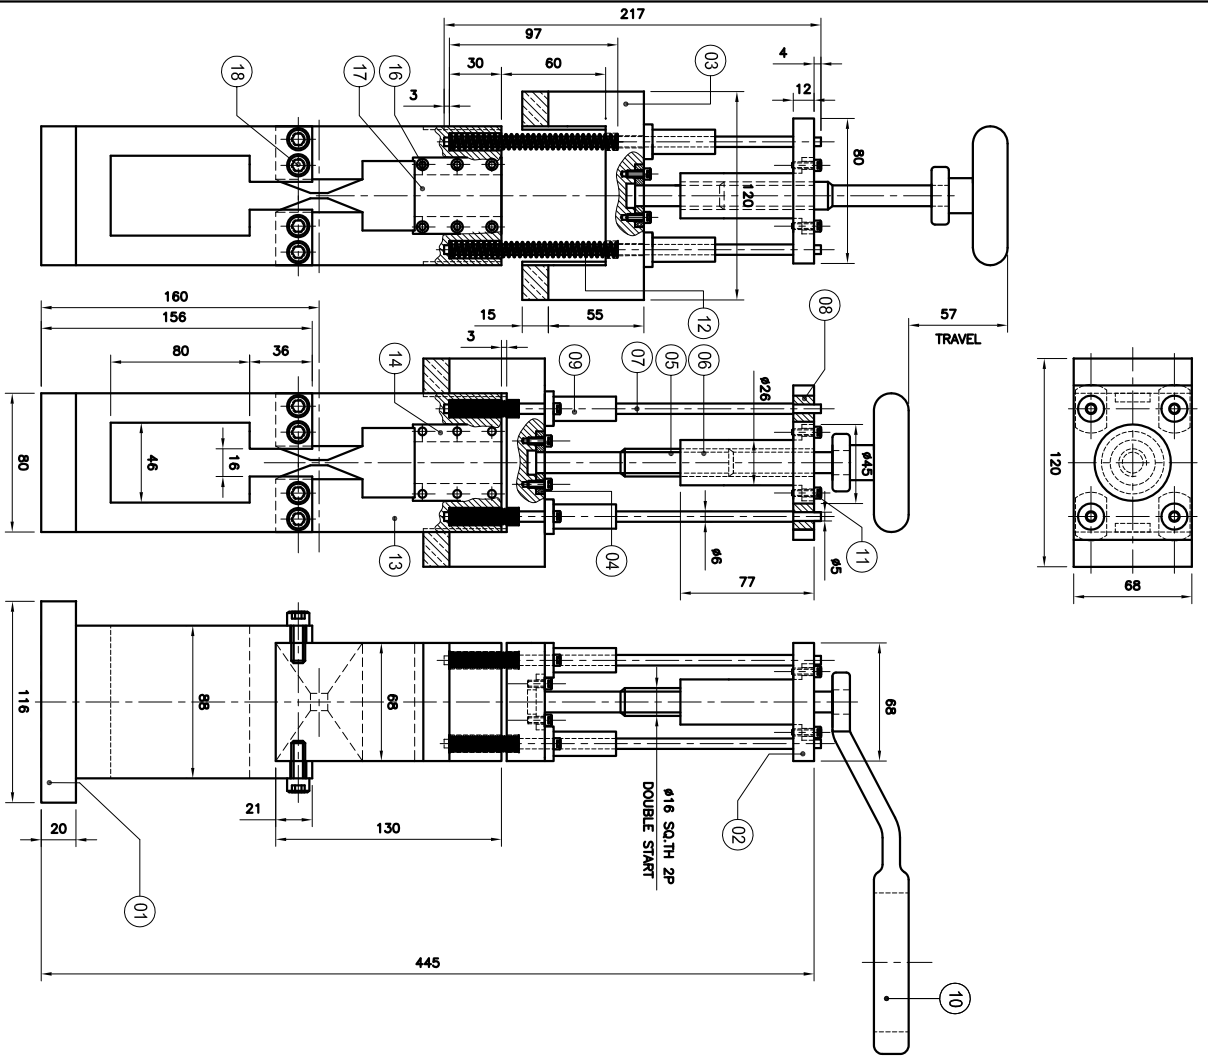

BILL OF MATERIAL

SR. NO.	DESCRIPTION	QTY.	MATERIAL	REF. DRG. NO.
01	AL BASE PLATFORM	01	AL-T6061	
02	TOP PLATE	01	AL-T6061	
03	SHUNT	01	ALSI 1010	
04	SCREW LOCK PLATE	01	ALSI 304	
05	SCREW	01	ALSI 304	
06	SCREW HOLDING BUSH	01	ALSI 304	
07	LINEAR BRG GUIDE ROD	02	ALSI 304	
08	BUSH	02	BRASS	
09	LINEAR BRG. LMH 6L	04	TK MAKE	
10	HANDLE	01	ALSI 304	
11	HEX. SKT. HD.CAP SCREW M4x10	08	IS:2289 Gr. A2-70 (ALSI 304)	
12	SPRING WIRE DIA 1-OD 9	04	ENCONEL X-745	
13	PM DIPOLE	01	ALSI 1010	
14	BOBBIN	01	AL-T6061	
15	FREE	-	-	
16	HEX. SKT. HD.CAP SCREW M4x10	06	IS:2289 Gr. A2-70 (ALSI 304)	
17	MAGNET 12x20x50 LG	06	STD.	
18	HEX. SKT. HD.CAP SCREW M8x10	08	IS:2289 Gr. A2-70 (ALSI 304)	

TITLE:-		PROJECT		DRG. CHK'D.		DRG. DES'N	
G.A. OF TUNABLE DIPOLE MAGNET		GOVERNMENT OF INDIA BHABHA ATOMIC RESEARCH CENTRE ACCELERATOR CONTROL DIVISION.		29.05.2018			
APPR'D.		ALL DIMENSIONS ARE IN mm		REV.		DATE 09.02.2018	
SCALE 1:1		DRG. No. A3-A02TCA73		SH 1 OF 1		DATE	



